

THE ULTIMATE USER EXPERIENCE

XK workstation cranes



For dynamic material handling and highfrequency use

Konecranes workstation cranes are designed to meet the demanding requirements of workstations and production lines that need to lift up to 2,000 kg. The XK-A aluminum system is extremely light and durable, while the XK-S steel profiles are strong and robust.

Options for different lifting needs

Our workstation cranes have a wide range of configurations. Use them freestanding or mounted to building structure, with single- or double-girder bridges, or even on a monorail. If your production requirements or layout changes, modular design of the XK gives you the flexibility to easily adjust the crane at minimal cost.

User experience drives safety and efficiency

The safest crane gives operators complete control of the load. Konecranes workstation cranes are made from high guality components working together to produce an ergonomic operating environment with smooth traveling and minimal noise. Without distractions, a comfortable operator can concentrate on load control.

When loads and spans are small, it sometimes makes sense to move the crane horizontally by hand. To help the operator with this task, Konecranes workstation cranes use lightweight components with low rolling resistance and smooth motion. An articulated crane bridge allows the load to be moved with much less physical force, regardless of its starting position.

When loads and spans are larger or within a complex system, Konecranes workstation cranes utilize electric power. This helps prevent operator fatigue and improves safety in the work environment. Generally, any load over 1,000 kg or a girder length over 6 m needs a travel drive.



GUIDING DESIGN PRINCIPLES

With a full set of standard components, all of which have been thoroughly tested, we can provide the best lifting equipment for your needs—from basic workstations to highly-tailored specialist installations.

Simple or complex, our workstation cranes are always designed for compliance with local safety regulations and standards, lowmaintenance requirements, and quick and easy erection. The modular design allows alteration and expansion whenever lifting requirements change.

Workstation cranes are designed according to EN standards.

XK workstation cranes basic elements

The basic construction kit consists of simple, well-engineered components. Standardized dimensions allow for rapid erection and existing installations can be easily modified or extended.

CRANE RUNWAYS AND BRIDGES



XK-A profiles are exinto unique shapes m

XK-S profiles are made of cold rolled steel with a smooth surface finish for easy bridge trolley travel as well as dust and dirt protection. A durable profile, it has a long lifetime with minimal maintenance requirements. Its strength allows long suspension distances and span lengths. **XK-A profiles** are extruded into unique shapes making them highly rigid with a low deadweight. Its anodized aluminum surface is ideal for clean environments. Aluminum is about 50% lighter than steel which helps reduce rolling resistance and makes manual operation almost effortless.

HOIST AND BRIDGE TROLLEYS



Production lines often have limited space available, but the compact design of XK trolleys and bridges helps you maximize your working area. The double girder trolley lies between the girder so the hook can be lifted for flexible headroom under the crane.



Konecranes XK workstation cranes offer the right load bearing and durable, high-quality components. The trolley moves smoothly and quietly along its track with minimal maintenance requirements throughout its lifetime. **RUNWAY SUSPENSION**

Runways can be attached to ceiling supports such as concrete pillars or steel beams near the wall. If these are not available, the XK can be assembled around a freestanding steel structure. This flexibility allows installation in almost any work setting.



The most common way to suspend a workstation crane is to clamp it to an l-beam. Other methods include:

- Bracket clamping around a beam (steel, wood, concrete);
 V-type suspension when
- structural supports are not directly above the runway track; • Anchor bolt attachment to concrete building structure:
- Side connection to any beam to maximize the working area.



Ĉ,

POWER SUPPLY

The XK workstation crane has a number of power supply options. To decide which solution is right for you, consider the cost, structure and purpose of the crane as well as available working space.

A **festoon** is the simplest and most economical way to provide hoists and motorized travel trolleys with electricity.

An **internal busbar** is a modern power supply method that uses copper conductors integrated into the crane profile. Power comes through the end of the runway or through line power feeds at key points. The busbar helps maximize safety, usability and the available working area.

Air provides lifting and balancing power for the Konecranes **ATB AirBalancer**. The kit contains all the components needed to feed pneumatic energy to a hoist in the workstation crane.

An **energy chain** combines the flexiblity of the festoon with the space saving of the busbar. The energy supply and control cables are inside a light, strong and modular plastic chain with easy maintenance access.

ERGONOMIC CONTROLLERS FOR SAFER OPERATIONS



Konecranes XK workstation cranes are controlled from a distance with a portable radio control or with a pendant controller hanging from the crane structure. The intuitive, ergonomic design of both types of controls maximizes load control and safety.







Multiple standard options for different lifting needs



Monorail system

Monorails are the simplest type of workstation crane. The hoist moves horizontally along a single track.

- Load capacity up to 2000kg (4000lbs)
- Straight track available for both XK-A and XK-S, curved tracks only with XK-S
- Manual or motorized operation



Single-girder crane

A single girder is simple and light in structure but steady and durable in operation. These cranes are especially suitable for manual control with small span lengths.

- Load capacity up to 2000kg (4000lbs)
- Maximized hook approach due to compact size
- Weight-optimized crane bridge and smooth running with low friction wheels
- Manual or motorized operation



Double-girder crane

Double girders offer an alternative to monorails and single girder cranes with larger capacities and longer span lengths. Due to bridge and trolley geometry, longer hook paths are standard in these cranes.

- Load capacity up to 2000kg (4000lbs)
- Flexible capacity and span selection
- Maximized hook path
- · Manual or motorized operation



Beyond the standard range

PERFORMANCE DATA Single-girder cranes

PROFILE SIZE	100	I	II-L	п	II-H	A12	A16	A18	A22
LOAD CAPACITY [KG]		GI XK-S	STH (M) XK-A						
80	3	6	8	8		5	8	8	8
125	3	5	8	8	14	4	6	8	8
250		3	7	8	13	2	4	7	8
500		2	4	7	11	2	3	4	6
1000			2	4	7			3	4
1600					6				3
2000					5				3

Other technical details

- Lifting classification H1 B3
- Ambient temperature is defined by electrical components and thus typically limited to range from -20°C to +40°C (+50°C)
- Standard corrosion category min. C2-M, higher classes available

PERFORMANCE DATA Double-girder cranes

100	I	II-L	п	II-H	A12	A16	A18	A22		
GIRDER LENGTH (M)										
	XK-S		ХК-А							
5	9	10	12	14	7	8	8	8		
	6	10	12	14	5	8	8	8		
	4	7	11	14	3	4	8	6		
		5	7	12			5	6		
			5	9				5		
			4	7				4		
		59 6	G XK-S 5 9 10 6 10 4 7	GIRDE XK-S 5 9 10 12 6 10 12 4 7 11 4 7 5 5	GIRDER LENG XK-S 5 9 10 12 14 6 10 12 14 4 7 11 14 5 5 7 12 5 9 5 9	GIRDER LENGTH (1 XK-S 5 9 10 12 14 7 6 10 12 14 5 4 7 11 14 3 5 5 7 12 14	GIRDER LENGTH (M) XK-S XK 5 9 10 12 14 7 8 6 10 12 14 5 8 4 7 11 14 3 4 5 7 12 - 5 7 5 7 9 10 14 5 8	XK-S XK-A 5 9 10 12 14 7 8 8 6 10 12 14 5 8 8 4 7 11 14 3 4 8 5 7 12 5 5 5 9 5		



Extending cranes

Sometimes your production process needs more flexibility than what the normal crane span between runways can provide. Konecranes offers you bridge solutions that extend beyond the runways. This widens the operating space of the crane with a bridge extension.

Low headroom cranes

Standard Konecranes workstation cranes are designed to be as compact as possible to maximize your working area with optimal approach dimensions. When the building structure limits available space, a raised girder solution will give you the critical extra height you need for your operation.



Versatile track systems

Your production process might require a more intricate combination of straight and curved track sections, track switches, turn tables and latching devices. Konecranes can offer you a crane structure optimized to your specific needs.

Hoists that lift your game






The C-series is an ergonomic and efficient lifting partner to support your everyday processes. With flexible speed options, it's tough, precise, reliable and designed for more than a million operations. The ATB AirBalancer is ideal for assembly, packing or other manual load maneuvering, with fast pick and place operations and highly accurate positioning using air pressure for power.



The belt hoist is the right choice for electronic, pharmaceutical and food industry applications, or anywhere your workspace must be properly clean and hygienic.

Manual products can easily adapt to any location, including heavy-duty operations such as construction, maintenance and service work where electricity is not available.

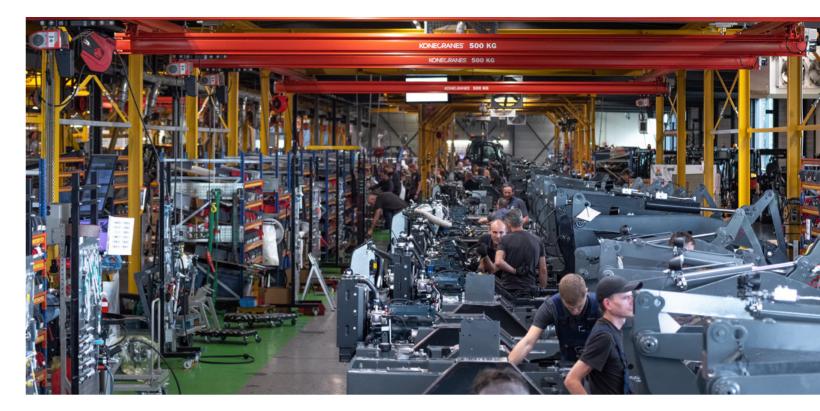


Industries and applications for the XK crane

Automotive

The XK workstation crane is a good choice for demanding automotive applications. You can choose from a variety of lifting devices for an ergonomic and efficient workstation.

An XK crane equipped with an ATB AirBalancer offers you precision speed control and ergonomic load handling making it perfect for assembly operations. The AirBalancer—with continuous threedimensional movement—is also ideal for lifting fragile items such as glass. Producing food and medicine means adhering to strict safety and sanitation requirements. The anodized aluminum surface of the light and durable XK-A aluminum system is ideal for clean environments and when production lines have limited space available, the compact design of the XK trolleys and bridges helps you maximize your working area.

The Konecranes belt hoist is a good choice for clean applications because it features a polyester belt that does not require lubricants, so you don't have to worry about contaminants getting into your product.

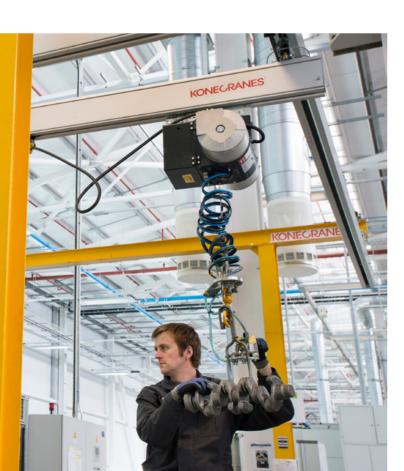

Maintenance cranes

Cranes and hoists used in maintenance activities may only be used occasionally but they still play a big role in maintaining a safe working environment. With protection against dust, chemical and moisture exposure, Konecranes XK workstation cranes using C-series hoists offer durability in challenging process environments in industries such as metals production, power, paper and forest, and waste to energy and biomass.

Konecranes 9

Food and pharmaceuticals

General manufacturing

Manufacturing facilities must maintain a constant flow of materials, from incoming prefab or raw process ingredients—all the way to packaging and shipping.

When any interruption is a production loss, Konecranes XK workstation cranes can help you keep your workflow running with minimal delays and maximum output.

Every facility is different and the XK crane can be designed to fit your specific application. If your production requirements or layout changes, the modular design of the XK gives you the flexibility to easily adjust the crane at minimal cost.

Maximize crane reliability and performance

An active service program is vital for the safety and productivity of vour workstation cranes. Regular inspections and preventive maintenance help identify risks and opportunities for improvement while supporting compliance with safety regulations.


Preventive maintenance conducted at regularly scheduled intervals can often be the most effective way to maintain and potentially extend the lifespan of your cranes. Konecranes experts can help you build a service program—from basic inspections to a comprehensive maintenance program-tailored to your operations.

Our service programs come with access to the yourKONECRANES customer portal. The portal provides you with a quick overview of maintenance activities, open safety and production risks, a fleet view of your assets, and a record of your service reports.

Why choose Konecranes as your crane service provider?

We have the largest and most extensive service network in the industry, servicing hundreds of thousands of assets each year of all different makes and models. You get the advantage of local inspectors and technicians with access to a wealth of knowledge from around the globe. We take a comprehensive, systematic and collaborative approach to managing your assets throughout their lifecycle. We take time to meet with you oneon-one to share our findings, provide recommendations based on our industryleading expertise and discuss how each action impacts your operations and the entire health of your business.




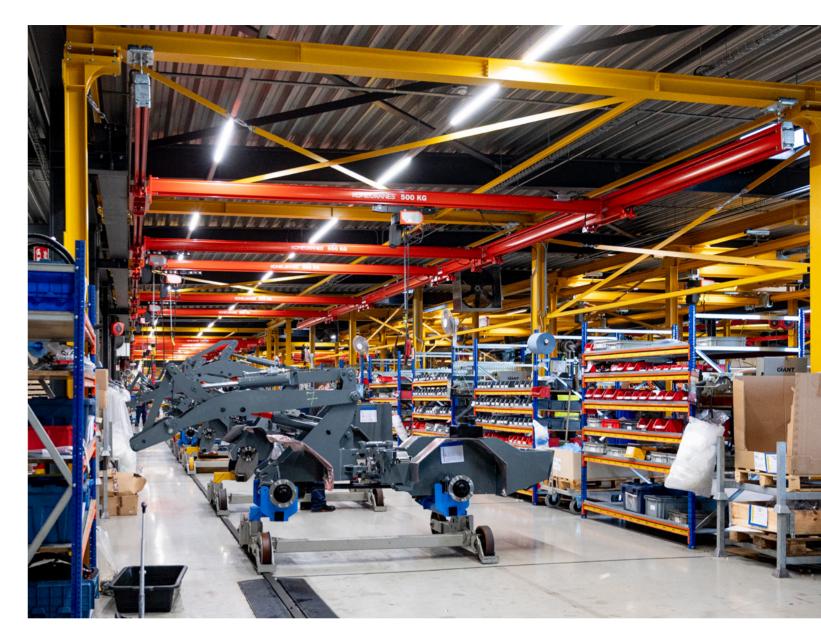

Sustainability at every stage of the crane's lifecycle

Konecranes is committed to providing sustainable solutions and services while preventing and minimizing emissions and waste.

Lifecycle thinking combined with usability, eco-efficiency and safety guide us in our product design. Our aim is to maximize the lifecycle value of our products.

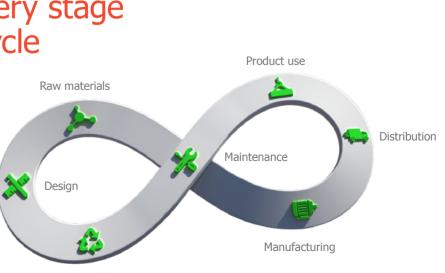

Konecranes is a world-leading group of Lifting Businesses, serving a broad range of customers, including manufacturing and process industries, shipyards, ports and terminals. Konecranes provides productivity enhancing lifting solutions as well as services for lifting equipment of all makes. In 2022, Group sales totaled EUR 3.4 billion. The Group has approximately 16,500 employees in around 50 countries. Konecranes shares are listed on the Nasdaq Helsinki (symbol: KCR).

 \odot 2023 Konecranes. All rights reserved. 'Konecranes', 'Lifting Businesses' and $\ref{eq:second}$ are either registered trademarks or trademarks of Konecranes.

This publication is for general informational purposes only. Konecranes reserves the right at any time, without notice, to alter or discontinue the products and/or specifications referenced herein. This publication creates no warranty on the part of Konecranes, express or implied, including but not limited to any implied warranty or merchantability or fitness for a particular purpose.



CONTACT US TODAY TO SEE WHICH WORKSTATION CRANE SETUP IS RIGHT FOR YOU

konecranes.com/contact-us

